

TEXONIC
AUDIO 

Ceiling Speaker

A-502T




www.avteck.ca




OWNER'S MANUAL

Dimension

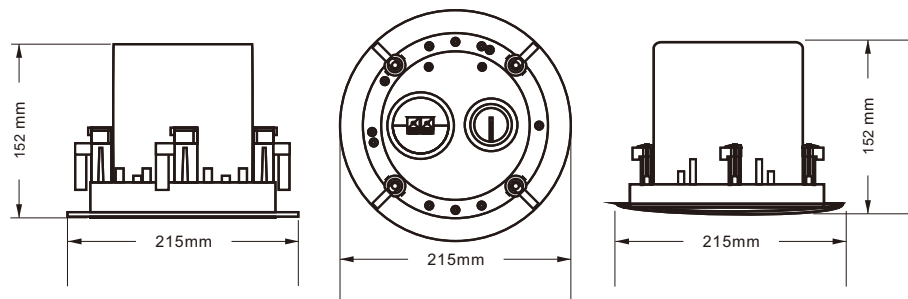

A-502T

Installation

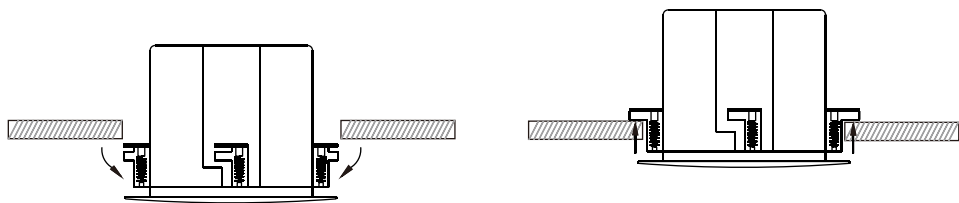

Step 1 The ceiling opening size, the wiring through the hole to open a good connection on the speaker.

Step 2 The mask opening speaker.

Step 3 Speakers installed in the ceiling and fixed. So close to the edge of the ceiling speakers, rotating clockwise and tighten the screws.

Note

- 1.100V input a pressure signal to prohibit the switching of the hit "-" position
- 2.When the switch position in 8Ω , bans the importation of 70V, 100V pressure signal

Specifications

Model	A-502T
Power Taps@100V	2.5/5/10/20W
Power Taps@70V	1.25/2.5/5/10/20W
Impedance	Black:Com,Red:4K Ω ,2K Ω ,1K Ω ,500 Ω ,250 Ω
Input	70V/100V/8 Ω
SPL(1W/1M)	88dB \pm 3dB
Freq Resp	100-20KHz
Cutout size	180mm
Dimensions	215X152mm
Weight	1.4Kg

Label stickers

Diagram of the label sticker for the A-502T ceiling speaker. The sticker is 40.00 mm wide and 20.00 mm high. It contains the following technical specifications:

CEILING SPEAKER	
Power Taps@100V	2.5W/5W/10W/20W
Power Taps@70V	1.25W/2.5W/5W/10W/20W
Impedance	4K Ω /2K Ω /1K Ω /500 Ω /250 Ω /8 Ω
SPL(1W/1M)	88dB \pm 3dB
Freq Resp	100-20KHz

A-502T